

TECHNICAL DATA SHEET - G&G Bag HOUSE FILTER

Filter type:	G&G-Bag-HOUSE-12-13-127-35-A
Producer:	G&G filtration CZ, s.r.o.

Parameters of filtered gas

A1	Operating amount of filtered gas	13 100	m ³ /h
A2	Operating temperature	20	°C
A3	Amount of filtered gas (0°C)	12 210	Nm ³ /h
A4	Inlet dust concentration	300	g/m ³
A5	Operating pressure drop	1 200	Pa
A6	Maximum pressure drop	2 200	Pa

Filter media parameters

B1	Shape of filter medium		round hoses
B2	Type of filter medium		m-Aramide
B3	Density of filter medium	530	g/m ²
B4	Breathability filter media	300	mm/s @ 200 Pa
B5	Continuous temperature resistance	200	°C
B6	Momentary temperature resistance	220	°C

Filter equipment parameters

C1	Number of filter rods	156	ks
C2	Total filter area	218	m ²
C3	A/C parameter	1,00	m ³ /m ² /min
C4	Can velocity	0,93	m/s
C5	Flow from below the rods	13 100	m ³ /h
C6	Hose side flow	-	m ³ /h
C7	Polluted gas input		<i>into the filter hopper</i>

Dimensions of the filter part

D1	X-axis filter size	2 399	mm
D2	Y-axis filter size	2 451	mm
D3	The gap between the individual rods	55	mm
D4	Gap between filter rods with filter walls	70	mm
D5	Gap between rods and hopper	100	mm

Filter media arrangement

E1	Orientation of filter rods		vertical
E2	Diameter of filter rods	127	mm
E3	Length of filter rods	3 500	mm
E4	Rods attachment		snapping
E5	Inlet nozzle shape		venturi

Regeneration system

F1	Number of regeneration valves	12	pcs
F2	Size of regeneration valves	1 1/4°	
F3	Total compressed air consumption	22	Nm ³ /h
F4	Compressed air pressure	6	bar

Dimensions of the filtration device

G1	Total width of the filter	2 567	mm
G2	Total filter depth	2 619	mm
G3	Total filter height	7 760	mm
G4	Weight of the filter device	5 538	kg
G5	Emergency weight 1/3 hopper	287	kg
G6	Total weight incl. emergency filling	5 825	kg
G7	Foot load	4x 1457	kg

Dimensions of connecting flanges

H1	Contaminated gas inlet flange	Ø650	mm
H2	Clean gas outlet flange	400 x 1000	mm
H3	Hopper connecting flange	250 x 250	mm
H4	Filter foot size	250 x 250	mm

Material design of the filter

I1	Filter chamber material	11375	
I2	Hopper material	11375	
I3	Filter housing material thickness	4	mm
I4	Hopper material thickness	5	mm
I5	Thickness of stiffeners	6	mm
I6	Coating system	C4	

Material of thermal insulation

J1	Type of thermal insulation		mineral wool
J2	Coefficient of thermal conductivity	0,038	W/m.K
J3	Insulation thickness	100	mm
J4	Insulation cover		galvanized sheet metal
J5	Total insulation area of the cabinet	50,5	m ²
J6	Total insulation area of the hopper	11,9	m ²

Hopper heating

K1	Hopper heating system		electric resistance cable
K2	The total area of the heated part	10,75	m ²
K3	Heating power per 1 m ²	200	W
K4	Total heating power	2150	W



TECHNICAL DATA SHEET - G&G Bag HOUSE FILTER


Filter type:

G&G-Bag-HOUSE-12-13-127-35-A


Producer:

G&G filtration CZ, s.r.o.

Orientation drawing

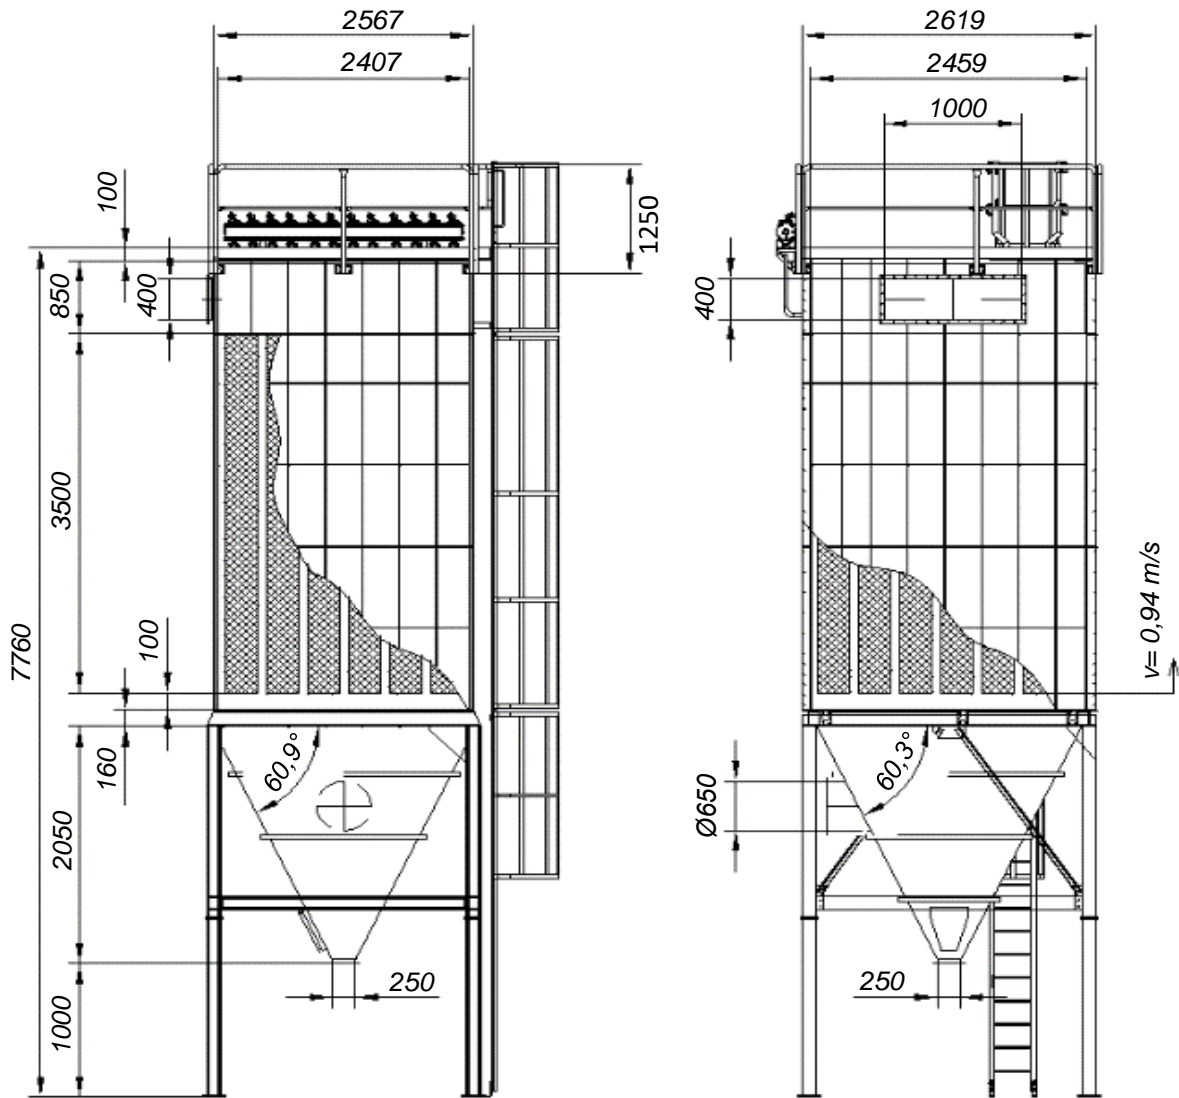

$m=5538$ kg

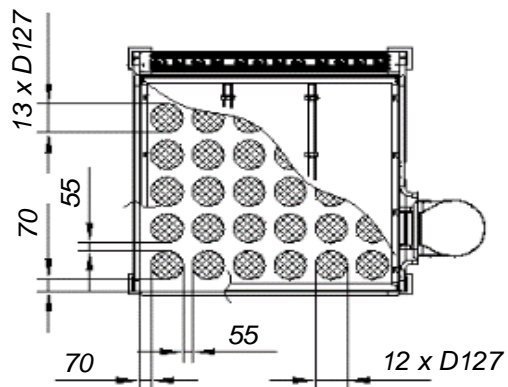

this is an orientation drawing

Files for download

STEP: <https://download.ggfiltration.com/G&G-Bag-HOUSE-12-13-127-35-A.step>

DWG: <https://download.ggfiltration.com/G&G-Bag-HOUSE-12-13-127-35-A.dwg>



G&G filtration CZ, s.r.o.
Hrubínova 1903/9
664 51 Šlapanice
Czech republic

IČO: 05226953
DIČ: CZ05226953
info@gg.cz
info@ggfiltration.com